

QA Technology is pleased to introduce a new self-cleaning slotted cup, **52** tip style. The cup style is typically used on leads, posts or pins where you want the probe's tip to trap the contact point.

Typical contamination and flux build-up from the test environment can insulate a cup from making contact with the UUT causing false test failures. This new design has six narrow slots to allow flux and other contaminants an escape route reducing build-up. The inside edges where the slots enter the cup also offer the added benefit of making it slightly more aggressive to create a better contact.

Available in the following Conventional and X Probe Socketless product sizes as gold plated beryllium copper:


100-25 Series

.100 [2.54] center, .250 [6.35] Stroke

X75-25 Series

.075 [1.91] center, .250 [6.35] Stroke

Contact Customer Service at (603) 926-0348 for samples and pricing.

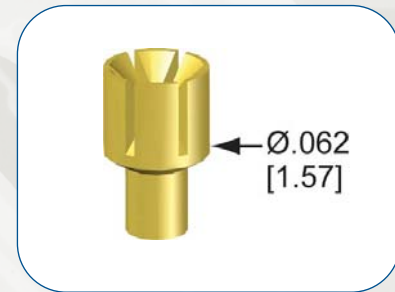

Part Numbers

100-PR_2552_

X75-PRP2552_

All dimensions are in inches [mm]. All spring forces are in ounces [gms].